



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Overflow half coupling at the static water mark; seal limit 0.084 bar	2026-10-02	AC



TOP VIEW
Scale 1:20; looking down (along -Z)

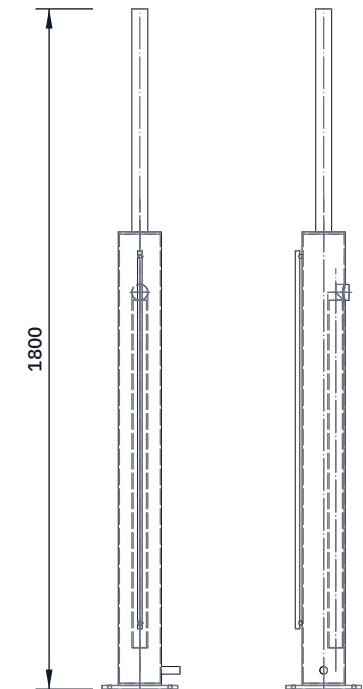

FRONT VIEW
Scale 1:20; looking at the front (along +Y)

RIGHT VIEW
Scale 1:20; looking at the right side (along -X)



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Pot: 114.3 OD pipe, 1200 tall, bottom cap welded on a 10 mm foot plate 200 x 200 (four 11 mm holes, 160 apart); top cap welded.

Dip leg: 42.2 OD pipe inside, against the back wall, its open end 100 above the pot bottom; its top is closed and joined to the header branch through the pot wall, 1040 above the foot.

Static water mark: 990 above the foot (890 above the dip leg end).

Overflow: 3/4 in half coupling welded in the right side with its bore bottom at the mark (centre 1000 above the foot); the overflow pipe (sketch 125) screws in. The pot can never fill above the mark, so steam can push the water down only 890: 0.084 bar at most.

Vent: 42.2 OD pipe from the centre of the top cap up to 2300 above the ground. Never valve, cap or narrow the vent.

Sight tube on the front, drain valve on the right near the bottom.

Check: fill to the mark; water shows in the sight tube.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot water-seal pot, dip leg and vent: making sketch

DRAWING NO. STR-DWG-116			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel pipe 114.3 OD and 42.2 OD; plate 10 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand