



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW

Scale 1:20; looking down (along -Z)

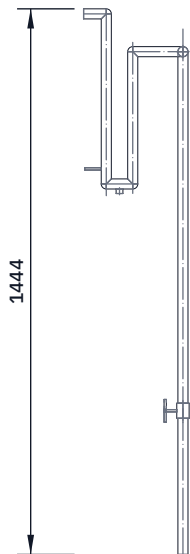


FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

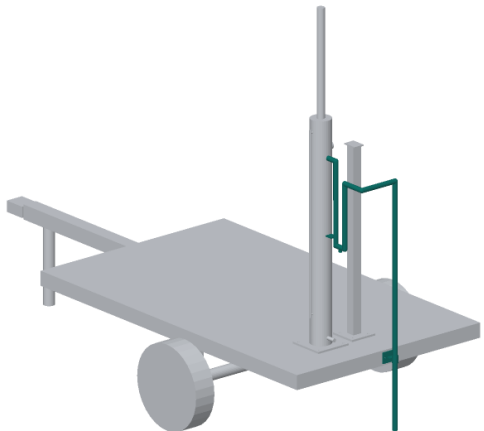

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

About 2.6 m of 3/4 in pipe and six elbows, screwed together:

from the pot's half coupling 60 to the right, then down 450, across 70, up 350 to the crown, back toward the trailer end, across to the centre line behind the deck, and down to 80 above the ground, open end pointing down.

The U holds 350 of water (a loop seal): steam in the pot cannot blow out of the overflow while the vent carries a surge.

Drain plug under the U: drain the U with the pot (frost).

Trap stay: 40 x 6 bar from the pot's clamp band to the down-leg.

Rear clip: 6 mm plate on the rear rail end (2 x M8), arm and band.

Check: pour water in the pot above the mark: it runs out at the ground; the outlet is behind the trailer, never at the operator.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot seal pot overflow, loop seal and clips: making sketch

DRAWING NO.

STR-DWG-125

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:20

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Galvanised steel pipe 3/4 in (26.7 OD); flat bar 40 x 6 mm