
BUILD PLAN SKETCH, PLAN NOT YET BUILT

SteamRoot · github.com/BoujeeEnjinia1701/steamroot

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
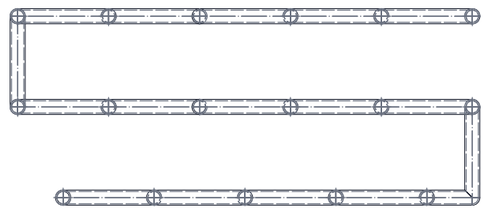


TOP VIEW

Scale 1:5; looking down (along -Z)

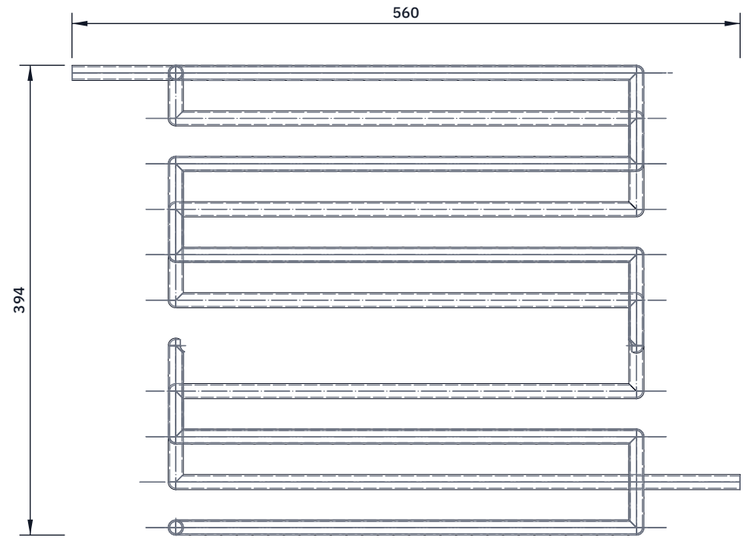


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

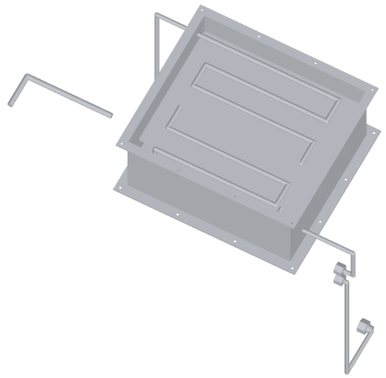

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

About 7.3 m of 12.7 x 1.2 stainless tube, bent into a serpentine in three layers. Each straight run is 310 long between bends.
All bends 38 radius (a standard 1/2 in hand bender): runs and layers 76 apart. Top layer 212 above the box floor, six runs; middle layer 136 up, six runs; bottom layer 60 up, five runs.
Water goes in at the top layer, left end, 190 behind the centre line, and out at the bottom layer, right end, 152 in front: the gas rises past colder and colder tube (counterflow).
The layers join with short risers at the left end.
Fit: lower the bank into the open box onto the support bars, then connect each end to its bulkhead union in the end wall.
Check: pressure test with water; no run touches the walls.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot economizer tube bank: making sketch

DRAWING NO.	REV	SHEET	SIZE
STR-DWG-112	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Stainless steel 316 tube 12.7 OD x 1.2 wall

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand